

## PRODUCT OVERVIEW



A **GlowbackLED** exclusive, create **DOTLESS** Lighting in **ANY** of our aluminum profiles—no matter the depth—with our new ultra high density, low power (for maximum lifetime) **24V White CS35240LP** LED strip. Designed specifically for high-quality linear LED lighting installations, our highly efficient 24V White CS35240LP LED strip allows you to create long lasting, headache-free lighting right out of the package. Its **Ultra-High Density** design allows one to achieve well over **50,000 hours** of useful **DOTLESS** lighting when used with one of our aluminum profiles for LED strips to draw out heat and protect strips from any damaging elements. Our **24V White CS35240LP** LED Strip comes with the UL-stamp of approval and is **UL-listed** for use in both the United States and Canada (cUL).

The **24V White CS35240LP** LED Strip comes in a **16'5" roll/reel** and is **0.39" (10mm) wide**. **3528** LED chips are mounted on a flexible PCB every **0.15"** apart. The full LED strip spool has about 1,200 LED chips packed in a **high-density—72 LED/ft (240/M)**—configuration. The LED strip comes with **(1) 6" 18-2 wire lead** with bare, tin-coated ends, for fast and reliable wire-to-wire connections. This LED Strip produces an average of **280 lumens/ft** and consumes an average of **3.3 Watts/ft and 93 lumens/watt**. Effortlessly cut this LED strip every **0.95"** (or every 6 LED chips).

### Strip Specifications

\*[XX] denotes color temperature

<b>Part#</b>	24VCS35240LPXX*
<b>Roll Length</b>	16'5" (197")
<b>Input Voltage</b>	24VDC
<b>Strip Width</b>	0.39" (10mm)
<b>Cut Increments</b>	Cuttable every 0.95"
<b>Color Rendering</b>	>90 (White Light)
<b>LED Type</b>	3528
<b>LED Density</b>	72 LEDs per foot (240/M)
<b>Wattage</b>	3.3 Watts/ft
<b>Light Output</b>	280 Lumens/ft
<b>Efficiency</b>	93 Lumens/Watt
<b>Lifetime</b>	50,000 Hours (Average)
<b>Warranty</b>	3-Year Limited Warranty
<b>IP-Rating</b>	IP-23 (For Indoor Use Only)
<b>Listings</b>	UL-Listed (US and Canada)

### Available Colors



2300K  
Extra Warm White



2700K  
Incandescent White



3000K  
Warm White




4000K  
Natural White



5000K  
Bright White

### Cut Points

Cut Every 0.95"

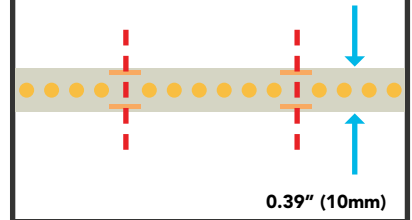




### Packaging



6" Pre-Soldered Lead

## Features

- **High Density (240/M) or 72 LED/ft configuration.**
- **Easy to Achieve DOTLESS lighting.**
- **High-Quality LED Strip!** Excellent thermal management for lasting installations.
- **UL-Listed!** (in US and Canada) Specify our strips on any commercial project!
- **Dimmable** with dimmable power supply.
- Available in a wide range of color temperatures.

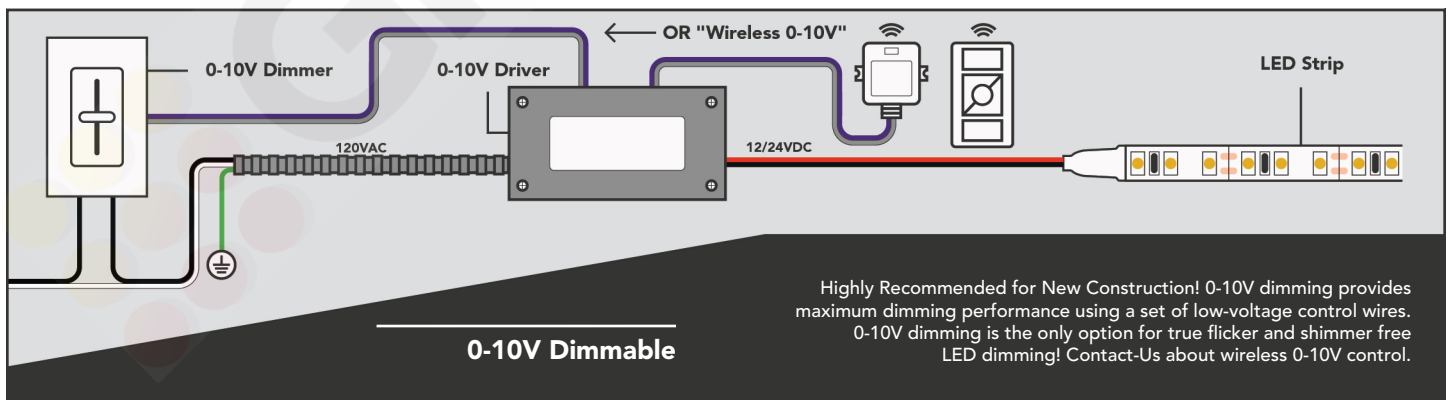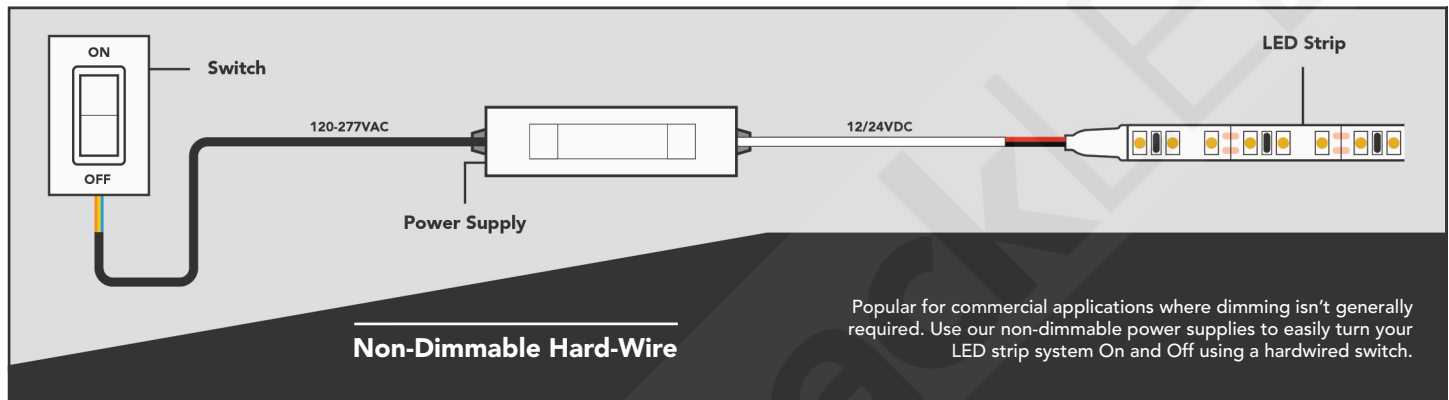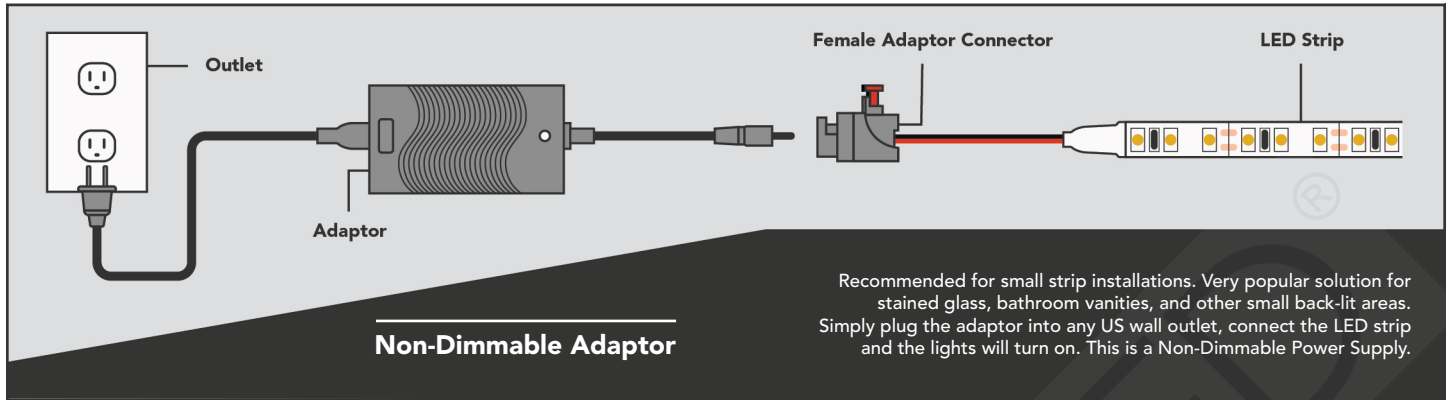

All of our LED Panels require a remote power supply and/or controller to operate. Seamlessly integrate our LED Panel systems with any type of home or building automation system. Unless otherwise specified, all LED Panel systems, including power supplies and controllers are shipped to you pre-configured, to facilitate installation. Power-Supplies will come "rigged" with connectors to match the connectors coming off the LED panels. When ordering, simply give us some details about the level of control that you want, and our team will design a turn-key control system fit to meet your needs.