


PRODUCT OVERVIEW



Specifications	
Product Code	BGPC-2108-24-200CVF
Dimensions	13.1" L x 1.6" W x 3.125" H
Wiring Terminals	Wire-in
Input Voltage	100-277VAC
Output Voltage	24VDC
Channels	Up to 4 Channels: Color Changing and White (RGBW)
Output Power	200W
Warranty	3-Year Limited Warranty
Environment	Indoor/Damp Location
Listings	UL Recognized Location

Our **BGPC-2108-24-200W-CVF DMXPRO** Receiver, is an all-in-one architectural grade constant voltage DMX decoder and driver capable of supporting universal DMX protocols, eliminating the need for a separate power supply. With integrated RDM functionality, our **all-in-one** decoder and driver allows one to address the decoder using the digital display buttons on the face of the receiver, or through an RDM capable controller. Through the buttons and digital display on the receiver numerous settings can be adjusted in order to achieve the best solution for the desired project, including PWM output frequency, PWM output resolution, and selecting from linear or logarithmic dimming. This receiver is capable of handling up to 4 channels, meaning that one can assign a DMX address to most types of LED Lighting Fixtures. From standard white fixtures, to RGB or RGB+W, or Tunable white lights. Our **DMXPRO all-in-one** receiver and driver offers unmatched convenience and power to achieve custom vivid color changing lighting from a compact housing.

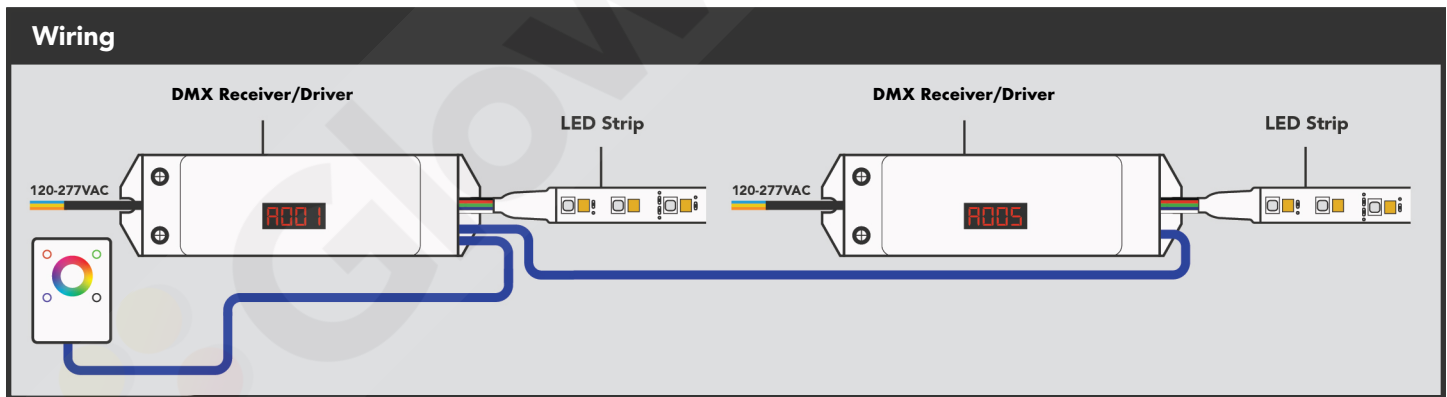

Features

- **Smooth Flicker-Free** Dimming.
- Assign **individual** DMX Addresses.
- **Easy** wire-in terminals.
- **Universal Voltage** Input.
- **GAMMA Ray Dimming** Curve Values.
- **4x 4A Channels** Constant Voltage Output.
- **Professional Tool** for **Bespoke** LED Lighting Control.